

Product Features

- Up to 53.125Gbps data rate per channel by PAM4 modulation
- 8 x 53.125 Gbps PAM4 electrical interface (400GAUI-8)
- Integrated 850nm VCSEL array and PD array
- DDM function implemented
- Operating case temperature: 0 to 70 °C
- Single 3.3 V power supply
- RoHS compliant

Application

- Data Centers Network
- 400G Ethernet

Standards

- IEEE 802.3cd
- QSFP-DD MSA
- CMIS4.0

Description

400G QSFP-DD AOC is active cable for optical communication applications, and it is compliant with QSFP-DD MSA, IEEE 802.3cd and 400GAUI-8 standards.

Absolute Maximum Ratings:

Module performance is not guaranteed and reliability is not implied for any condition that beyond the operating range. Exceeding the limits below may damage the transceiver module permanently.

Parameter	unit	Min	Max
Case Operating Temperature	°C	0	+70
Storage Temperature Range	°C	-40	+85
Relative Humidity	%	0	85
Power Supply Voltage	V	-0.3	+3.6

Product	Modulation	Nominal Rate		Specifications		Link distance over OM3	Link distance over OM4
		Aggregate (Gbps)	Electrical Lanes(Gbaud)	High Speed Electrical	Pre-FEC Max BER		
400G-AOC	PAM4	425	26.5625	400GAUI-8	2.4E-4	70M	100M

Recommended Operating Conditions:


Parameter	Min	Typ	Max	Unit
Operating Case Temperature Range	0		70	°C
Power Supply Voltage	3.135	3.3	3.465	V
Data Rate(Per channel)		106.25		Gbps

Electrical Characteristics:

Parameter	Unit	Min	Typ	Max	Notes
Supply Voltage	V	3.135	3.3	3.465	
Power Consumption	W			16	
Receiver					
Data rate, each lane	GBd	26.5625 ± 100 ppm			
Overload differential voltage pk-pk	mV	900			
Common mode voltage	mV	-350		2850	
Differential termination resistance mismatch	%			10	At 1 MHz
Differential return loss (SDD11)	dB			Equation(16-1)	OIF-CEI-56G-VSR PAM4
Common mode to differential mode conversion (SCD11)	dB			Equation(16-2)	OIF-CEI-56G-VSR PAM4
Transmitter					
Data rate, each lane	GBd	26.5625 ± 100 ppm			
Differential voltage, pk-pk	mV			900	
Common mode voltage (Vcm)	mV	-300		2850	

Common mode noise, RMS	mV			17.5	
Differential termination resistance mismatch	%			10	At 1 MHz
Differential return loss (SDD22)	dB			Equation(16-1)	
Common mode to differential mode conversion (SCD22)	dB			Equation(16-3)	
Common mode return loss(SCC22)	dB			-2	From 250 MHz to 19 GHz
Transition time	ps	9.5			
Near-end eye width at 10-6 probability (EW6)	UI	0.265			
Near-end eye height at 10-6 probability (EH6)	mV	70			
Far-end eye width at 10-6 probability (EW6)	UI	0.2			
Far-end eye height at 10-6 probability (EH6)	mV	30			
Near-end eye linearity		0.85			

Pin Definition and Description

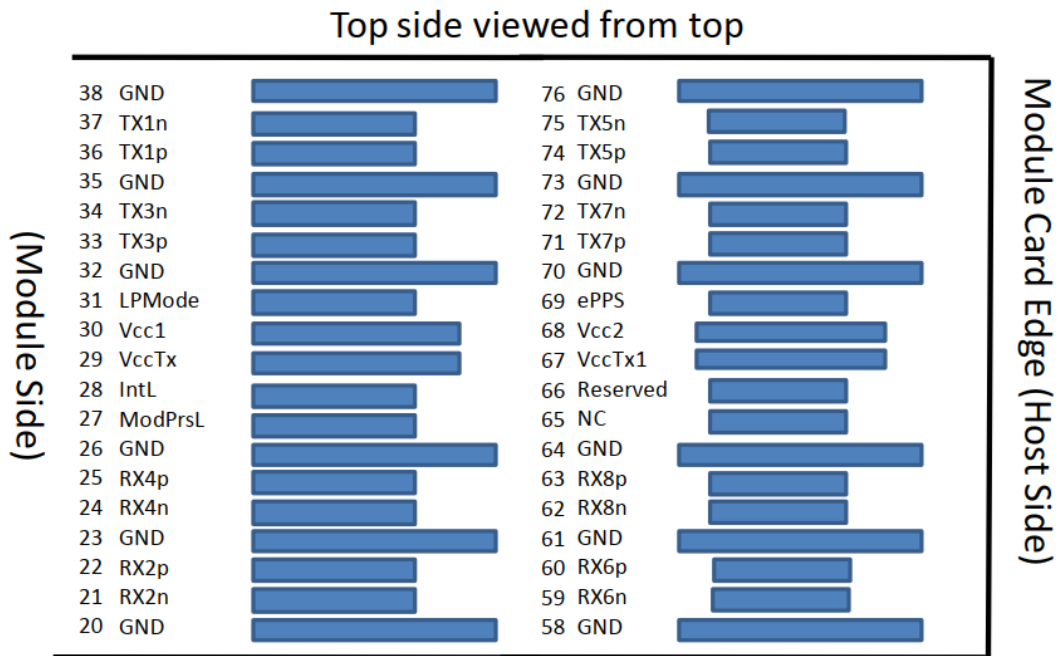

Bottom side viewed from bottom

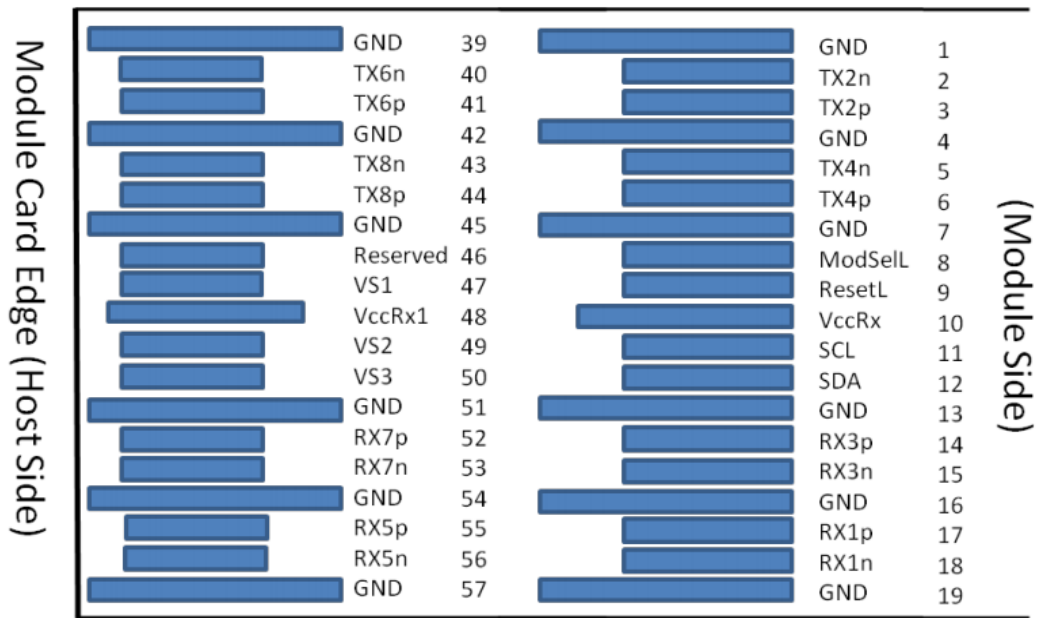


Table 1. Pin definition and descriptions

PIN	Symbol	Description	Plug Sequence ⁴	Note
1	GND	Ground	1B	1
2	Tx2n	CML-I Transmitter 2 Inverted Data Input	3B	
3	Tx2p	CML-I Transmitter 2 Non-Inverted Data Input	3B	
4	GND	Ground	1B	1
5	Tx4n	CML-I Transmitter 4 Inverted Data Input	3B	
6	Tx4p	CML-I Transmitter 4 Non-Inverted Data Input	3B	
7	GND	Ground	1B	1
8	ModSelL	LVTTLL-I Module Select	3B	
9	ResetL	LVTTLL-I Module Reset	3B	
10	VCCRx	+3.3V Power Supply Receiver	2B	2
11	SCL	LVC MOS-I/O 2-Wire Serial Interface Clock	3B	
12	SDA	LVC MOS-I/O 2-Wire Serial Interface Data	3B	
13	GND	Ground	1B	1
14	Rx3p	CML-O Receiver 3 Non-Inverted Data Output	3B	
15	Rx3n	CML-O Receiver 3 Inverted Data Output	3B	
16	GND	Ground	1B	1
17	Rx1p	CML-O Receiver 1 Non-Inverted Data Output	3B	
18	Rx1n	CML-O Receiver 1 Inverted Data Output	3B	
19	GND	Ground	1B	1
20	GND	Ground	1B	1
21	Rx2n	CML-O Receiver 2 Inverted Data Output	3B	
22	Rx2p	CML-O Receiver 2 Non-Inverted Data Output	3B	
23	GND	Ground	1B	1
24	Rx4n	CML-O Receiver 4 Inverted Data Output	3B	
25	Rx4p	CML-O Receiver 4 Non-Inverted Data Output	3B	

400G QSFP-DD ACTIVE OPTICAL CABLE
850nm, VCSEL, 0~70°C



26	GND	Ground	1B	1
27	ModPrsL	Module Present	3B	
28	IntL	Interrupt	3B	
29	VCCTx	+3.3V Power Supply Transmitter	2B	2
30	VCC1	+3.3V Power Supply	2B	2
31	LPMoDe	LVTTLL-I Low Power Mode	3B	
32	GND	Ground	1B	1
33	Tx3p	CML-I Transmitter 3 Non-Inverted Data Input	3B	
34	Tx3n	CML-I Transmitter 3 Inverted Data Input	3B	
35	GND	Ground	1B	1
36	Tx1p	CML-I Transmitter 1 Non-Inverted Data Input	3B	
37	Tx1n	CML-I Transmitter 1 Inverted Data Input	3B	
38	GND	Ground	1B	1
39	GND	Ground	1A	1
40	Tx6n	CML-I Transmitter 6 Inverted Data Input	3A	
41	Tx6p	CML-I Transmitter 6 Non-Inverted Data Input	3A	
42	GND	Ground	1A	1
43	Tx8n	CML-I Transmitter 8 Inverted Data Input	3A	
44	Tx8p	CML-I Transmitter 8 Non-Inverted Data Input	3A	
45	GND	Ground	1A	1
46	Reserved	For future use	3A	3
47	VS1	Module vendor specific 1	3A	3
48	VCCRx1	+3.3V Power Supply Receiver	2A	2
49	VS2	Module vendor specific 2	3A	3
50	VS3	Module vendor specific 3	3A	3
51	GND	Ground	1A	1
52	Rx7p	CML-O Receiver 7 Non-Inverted Data Output	3A	
53	Rx7n	CML-O Receiver 7 Inverted Data Output	3A	
54	GND	Ground	1A	1
55	Rx5p	CML-O Receiver 5 Non-Inverted Data Output	3A	
56	Rx5n	CML-O Receiver 5 Inverted Data Output	3A	
57	GND	Ground	1A	1
58	GND	Ground	1A	1
59	Rx6n	CML-O Receiver 6 Inverted Data Output	3A	
60	Rx6p	CML-O Receiver 6 Non-Inverted Data Output	3A	
61	GND	Ground	1A	1
62	Rx8n	CML-O Receiver 8 Inverted Data Output	3A	
63	Rx8p	CML-O Receiver 8 Non-Inverted Data Output	3A	
64	GND	Ground	1A	1
65	NC	No connect	3A	3
66	Reserved	For future use	3A	3
67	VCCTx1	+3.3V Power Supply Transmitter	2A	2
68	VCC2	+3.3V Power Supply	2A	2
69	ePPS	Precision Time Protocol (PTP) reference clock input	3A	3
70	GND	Ground	1A	1
71	Tx7p	CML-I Transmitter 7 Non-Inverted Data Input	3A	

72	Tx7n	CML-I Transmitter 7 Inverted Data Input	3A	
73	GND	Ground	1A	1
74	Tx5p	CML-I Transmitter 5 Non-Inverted Data Input	3A	
75	Tx5n	CML-I Transmitter 5 Inverted Data Input	3A	
76	GND	Ground	1A	1

Note 1: QSFP-DD uses common ground (GND) for all signals and supply (power). All are common within the QSFP-DD module and all module voltages are referenced to the potential unless otherwise noted. Connect these directly to the host board signal common ground plane.

Note 2: VccRx, VccRx1, Vcc1, Vcc2, VccTx and VccTx1 shall be applied concurrently. Requirements defined for the host side of the Host Card Edge Connector are listed in Table 7. VccRx, VccRx1, Vcc1, Vcc2, VccTx and VccTx1 may be internally connected with the module in any combination. The connector Vcc pins are each rated for a maximum current of 1000mA.

Note 3: All Vendor Specific, Reserved, No Connect and ePPS (if not used) pins may be terminated with 50 Ohms to ground on the host. Pad 65 (No Connect) shall be left unconnected within the module. Vendor specific and Reserved pads shall have an impedance to GND that is greater than 10 kOhms and less than 100 pF.

Note 4: plug Sequence specifies the mating sequence of the host connector and module. The sequence is 1A,2A,3A,1B,2B,3B. (see figure for pad locations) Contact sequence A will make, then break contact with additional QSFP-DD pads. Sequence 1A,1B will then occur simultaneously, followed by 2A,2B, followed by 3A,3B.


Digital Diagnostic Monitoring Functions

400G QSFP-DD AOC supports the I2C-based Diagnostic Monitoring Interface (DMI) defined in document QSFP-DD-CMIS-rev4p0. The host can access real-time performance of transmitter and receiver optical power, temperature, supply voltage and bias current.

Parameter	Data address		
	Alarm & Warning	Alarm & Warning thresholds	Monitor
Module temperature	Lower page 9	Page2h (128-135)	Lower page (14-15)
Module Voltage	Lower page 9	Page2h (136-143)	Lower page (16-17)
Bias current	Page11h(143-146)	Page2h (184-191)	Page11h (170-177)
Transmitter optical power	Page11h(139-142)	Page2h (176-183)	Page11h (154-161)
Receiver optical power	Page11h(149-152)	Page2h (192-199)	Page11h (186-193)

Mechanical Specifications

Compatible with the QSFP-DD Type 2 Specification for pluggable form factor modules.

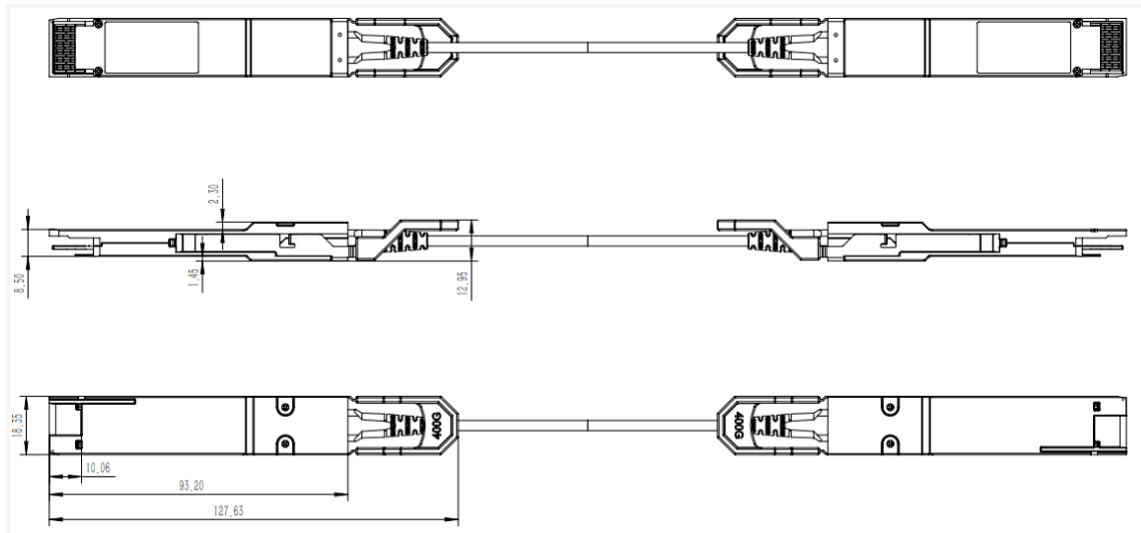

Ordering Information

Part Number	Data Rate	Link Length	Temp	DDMI
HAQDD-X1	4×106.25Gbps	1~100m	0~70°C	YES
Link length refers to OM3/OM4 fiber				
X denotes the AOC length with unit meter				
X=1、2、3、5、7、A、B、C、D、E denote 1m、2m、3m、5m、7m、10m、20m、30m、70m、100m link length.				

ESD Information

Normal ESD precautions are required during the handling of this module. This transceiver is shipped in ESD protective packaging. It should be removed from the packaging and otherwise handled in an ESD protected environment utilizing standard grounded benches, floor mats, and wrist straps.

Parameter	Threshold	Note
ESD of high-speed pins	1kV	Human body model
ESD of low-speed pins	2kV	Human body model
Air discharge during operation	15kV	
Direct contact discharges to the case	8kV	